

KEOR HPE 200-250-300

960572-953500-953501



1. TECHNICAL FEATURES 1

1. GENERAL FEATURES 1

2. INPUT: RECTIFIER AND BATTERY CHARGER 1

3. BATTERIES 1

4. OUTPUT INVERTER 2

5. BYPASS 2

6. Block Diagram 2

1. TECHNICAL FEATURES

1. General Features			
Power (KVA)	200	250	300
UPS Topology	ON LINE – Double Conversion		
Nominal Apparent Output Power (kVA Cosφ 1.0)	200	250	300
Nominal Active Output Power (kW Cosφ 1.0)	200	250	300
Efficiency (AC ÷ AC) (%)		Up to 94,8 Up to 95,8 Up to 95,8 Up to 95,3	
@25% load			
@50% load			
@75% load			
@100% load			
Efficiency (AC ÷ AC) (Eco Mode)		>98%	
Heat dissipation at rated load, VFI voltage (kW)	9,4	11,8	14,1
UPS Ambient Temperature (°C)		0 ÷ 40	
BATTERY ambient temperature (°C)		0 ÷ +25	
UPS storage temperature (°C)		-10 ÷ +70	
BATTERY storage temperature (°C)		-15 ÷ +40	
Relative humidity % (not condensing)		< 95%	
Altitude m		<1000 (Above Sea level)	
Power derating for altitude > 1000 m		According to "IEC62040-3", 0,5% every 100m	
Ventilation		Forced	
Requested cooling air volume (m3/h)	1800	2200	2300
Audible noise level (according to IEC EN 62040-3)		< 65dB	
Number of cells for standard Lead acid battery		360 ÷ 372	
Protection Degree		IP20	
Electromagnetic Compatibility EMI		According to "IEC EN 62040-2" (CE marking)	
Safety		IEC EN 62040-1	
Test and performance		IEC EN 62040-3	
Colour		RAL9005 (Black) RAL9003 (White)	
Accessibility		Front Access	
Installation		Against the Wall	
Dimensions (mm) (WxDxH)		880 x 970x1978	
Weight kg (without battery)	530	630	675
Input/output cable connection		Cables entry front bottom	
Transport		Base provided for forklift handling	
Storage and transport conditions		According to "IEC EN 62040-3"	
Reference standards		EN 62040-1 - EN62040-2 - EN62040-3 ISO 9001:2008 - ISO 14001	
Front panel		10" Touch-screen	
Voltage-free contact interface		Signalisations / alarms	
Serial communication interface		Standard: RS232 - USB Optional: RS485 (Mod-Bus RTU protocol)	
Parallel configuration (optional)		Up to 5+1 (redundant parallel) Up to 6 (power parallel)	

2. Input: rectifier and battery charger			
Power (KVA)	200	250	300
Input	Three-phase/ 3 Ph+N		
Nominal input voltage (Vac)	400		
Input voltage range (%)	-20/+15		
Input frequency (Hz)	50 - 60		
Input frequency range (%)	±10		
Input power factor	>0,99		
Input current THD at nominal voltage and THDV <0,5% (%)			
@25% load	< 8		
@50% load	< 4		
@75% load	< 3		
@100% load	< 2,5		
DC output voltage accuracy (%)	±1		
DC output voltage ripple (%)	<1 (RMS)		
Battery recharging characteristic	Intermittent charging with prevailing state of complete rest and control of the battery status IU (DIN 41773)		
Maximum recharging current (A)			
- at nominal load	30	40	40
- with DCM function (max current)	100	100	100
AC-DC converter type	IGBT-based PFC		
Input protection	Fuses		
Nominal current absorbed from mains (at nominal load and battery charged) (A)	302	378	453
Maximum current absorbed from mains (at nom. load, min. mains voltage and max. recharging current) (A)	423	530	627
Rectifier soft-start (walk-in) (sec)	Settable from 5" to 30"		
Rectifier sequential start-up (hold-off) (sec)	Settable from 1" to 300"		

3. Batteries			
Power (KVA)	200	250	300
Type (standard) other on request	Sealed lead acid (VRLA - maintenance free)		
Number of Cells	360 - 372		
Floating Voltage at 25°C	812 for 360 cells, 840 for 372 cells		
Minimum Discharge Voltage Vdc	620 for 360 cells, 632 for 372 cells		
Power drawn by the inverter (at rated load cosφ = 1) (KW)	204,1	255,1	306,1
Power drawn by the inverter (at rated load and minimum battery voltage) (KW)	329,0	411	494
Battery Protection	Fuses		
Battery Test	Provided as Standard		


KEOR HPE 200-250-300

960572-953500-953501

4. Output Inverter			
Power (KVA)	200	250	300
Inverter Bridge	3-Level IGBT (High Frequency PWM)		
Nominal Apparent Output Power (kVA Cosφ 1.0)	200	250	300
Nominal Active Output Power (kW Cosφ 1.0)	200	250	300
Efficiency (DC ÷ AC) (%)	Up to 96		
@25% load	Up to 97		
@50% load	Up to 97		
@75% load	Up to 98		
@100% load	Up to 98		
Output	3 Phase / 4 Wires		
Rated Output Voltage (selectable) (Vac)	380-400-415		
Output Voltage Stability			
- Static (Balanced Load) (%)	± 1		
- Static (Unbalanced Load) (%)	± 2		
- Dynamic (Step Load 20%÷ 100% ÷20%) (%)	± 5		
- Output Volt. Recovery Time(after step load) (ms)	< 20		
- IEC EN 62040-3	VFI-SS-111		
Phase Angle Accuracy (°)			
- Balanced Load	± 1		
- 100% Unbalanced Load	± 1		
Output Frequency (selectable) (Hz)	50 / 60		
Output Frequency Stability			
- Free Running Quartz Oscillator (Hz)	± 0,001		
- Inverter Sync. with Mains (Hz)	± 2 (other on request)		
- Slew rate (Hz/s)	< 1		
Nominal Output Current (@ 400 Vac output) (A)	289	361	433
Overload Capability	10 min >100%...110% 5 min > 110%...125% 30 s >125%... 150% 100 ms >150%		
Short Circuit Current (A)	714	893	1071
Short Circuit Characteristic	Current limited with electronic protection Automatic stop after 5 seconds		
Output Waveform	Sinewave		
Output Harmonic Distortion (%)			
- Linear Load	< 1		
- Non Linear Load	< 5		
- IEC EN 62040-3	Fully compliant		
Max Crest Factor without derating	3 : 1		

5. Bypass	
Automatic static by-pass	Electronic Thyristor Switch Three-phase + Neutral
Nominal input voltage (Vac)	380 – 400 - 415
Input voltage range (%)	±10
Input frequency (Hz)	50 - 60
Input frequency range (%)	±10
Transfer mode	Without break
Transfer: inverter - automatic bypass	In case of: - Short-circuit - Battery discharged - Inverter test - Inverter failure
Transfer: automatic bypass - inverter	- Automatic - Block on bypass after 6 transfers within 2 minutes, reset by front panel
Overload Capability (%)	150 Continuously 1000 For 1 Cycle
Manual By-Pass	- Electronically controlled - No-break assisted re-start procedure
Back-feed protection	NC contact for the control of an external device

6. Block Diagram

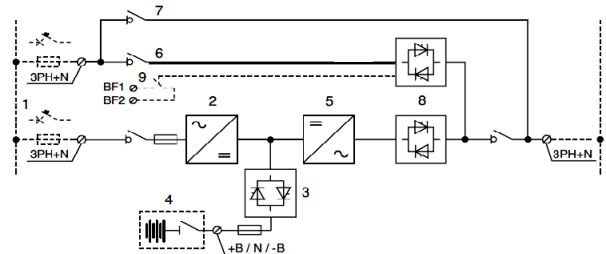

1. Separate mains input for rectifier and bypass
2. Rectifier battery-charger
3. Battery static switch
4. External battery
5. Inverter
6. Emergency line (bypass)
7. Maintenance bypass line
8. Inverter (SSI) and bypass (SSB) static switch
9. Optional contact for external back-feed protection

OPTIONS

1. BATTERY TEMPERATURE VOLTAGE COMPENSATION
2. SERIAL INTERFACE RS-485 (ModBus protocol RTU)
3. SNMP ADPTER
4. PARALLEL CARD INTERFACE KIT
5. LOAD-SYNC CARD INTERFACE KIT
6. ISOLATION TRANSFORMER
7. WALL MOUNTED FUSED SWITCH BOX

SOFTWARE ENABLED FUNCTIONS

1. DIESEL MODE OPERATION
2. RECTIFIER WALK-IN TIME
3. RECTIFIER DELAY ON STARTUP (HOLD-OFF TIME)
4. DYNAMIC CHARGING MODE (DCM)
5. VFD (ECO) OPERATING MODE MANAGEMENT
6. UHE (ULTRA HIGH EFFICIENCY) OPERATING MODE MANAGEMENT
7. FREQUENCY CONVERTER